


AW型-內齒型墊圈

AW Series Internal Toothed Lock Washers

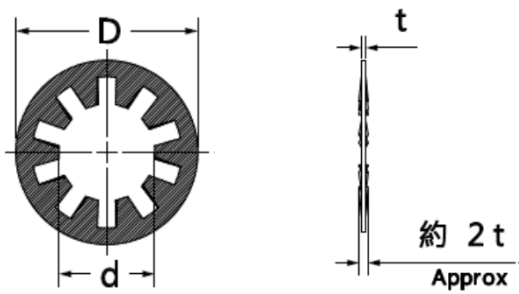

品 號 Washer No.	適用螺絲直徑 Screw/Thread Size			墊 圈 尺 寸 Lock Washer Dimension (mm)							包裝 Packing
				d		D		t		n	
內齒AW Internal	公制 mm	英制 Inch	美規番號 US Code(#)	內徑 ID.	公差 Tol.	外徑 OD.	公差 Tol.	厚度 Thickness	公差 Tol.	齒數 Nos of Teeth	最低訂購數 MOQ/MPQ
AW- 2.5(2.6)	2.5(2.6)	—		2.7	+0.2 -0	5.7	-0.3	0.3	±0.025	7	20,000
3	3	—		3.2		6.5	+0 -0.4	0.45	±0.035	6	10,000
3	3	—		3.2		6.5		0.45		7	10,000
3.5	3.5	—	6#	3.7		7.5		0.45		8	10,000
6#	—	0.138	6#	3.8		7.5		0.45		8	10,000
4	4	—		4.3		8.5		0.45		8	10,000
8#	—	0.164	8#	4.4		8.3		0.45		8	10,000
8#	—	0.164	8#	4.4		8.3		0.5		8	10,000
10#	—	0.186	10#	5		9.6		0.5	±0.04	8	5,000
5	5	—		5.3		10		0.5		8	5,000
5	5	—		5.3		10		0.6		8	5,000
6	6	—		6.4	+0.3 -0	11	+0 -0.5	0.6	±0.05	9	5,000
1/4"	—	1/4		6.5		12		0.6		9	5,000
7	7	—		7.4		13		0.8		10	5,000
5/16"	—	5/16		8.3		15.4		0.7		10	5,000
8	8	—		8.4		15		0.8		9	5,000
3/8"	—	3/8		9.8		17.5		0.8		9	4,000
3/8"	—	3/8		9.8		17.5		0.8		10	4,000
10	10	—		10.5		18		0.9	±0.055	9	4,000
7/16"	—	7/16		11.4	+0.4 -0	19.6	+0 -0.6	0.8		12	2,000
12	12	—		12.5		21		1.0		10	2,000
1/2"	—	1/2		13		22.5		1.0		12	2,000
5/8"	—	5/8		16.5		27		1.1		12	1,000
18	18	—		19	+0.5 -0	29	+0 -0.8	1.2	±0.065	12	1,000
3/4"	—	3/4		19.6		32		1.2	±0.07	12	500
7/8"	—	7/8		23.1		35.5		1.3		12	500
1"	—	1		26		41		1.5	±0.08	12	500
1-1/8"	—	1 1/8		29.6		46		1.5		12	500
1-1/4"	—	1 1/4		33		49		1.5		10	200

*未顯示於表格之規格歡迎來電洽詢/規格表僅供參考

*Other sizes may be available upon request

Copyright (c) 2024 MK Spring Co., Ltd. All Rights Reserved



✓ 規格標準 Standard Reference

日本工業規格 JIS B 1251

美國標準規格 ASME B18. 21.1

德國工業規格 DIN 6797 Form J

(續下頁)


◆ **AW型-內齒型墊圈**

AW Series Internal Toothed Lock Washers

茂銓企業股份有限公司

MK Spring Co., Ltd.

Tel: +886-2-29901599 | service@mkspring.com.tw

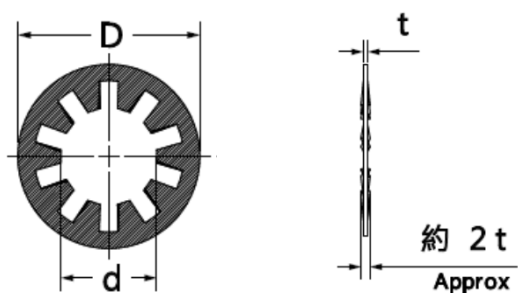

✓ **材質、硬度 & 表面處理 Material, Hardness Ranges & Finish**

材質 Material	硬度 Hardness Ranges	表面 Finish
彈簧鋼 SAE1050~SAE1070 Carbon Spring Steel	HRC 40-50 (Rockwell scale)	染黑 Black Oxide
		鍍三價白鋅 Zinc Plating, Cr6+ free (Blue)
		鍍三價五彩鋅 Zinc Plating, Cr6+ free (Yellow)
		鍍鎳 Nickel Plating

✓ **包裝方式 Packaging**

散裝 Bulk

*最低訂購數量詳見本規格表右側 MOQ/MPQ limit required

MK SPRING